


# WIND POWER SYSTEM

- WIND ASSESSMENT
- WIND PROSPECTING
- TURBINE PERFORMANCE 

  ALERT MESSAGES
- REMOTE MONITORING
- AUTOMATIC SMS and Email







### SYSTEM DESCRIPTION

The **Wind Power System** has been designed around the Remote Data Acquisition and Transmission Unit, Model **METEODATA-2000/3000C** Series, working as a data logger, PLC and RTU device, combined with a dedicated management software pakage.

This advanced wind monitoring system allows you to determine whether your site is a good candidate to harvest wind power, as well as to carry out many other additional measurements, to operate as a remote controller, or to generate programable alarms.

Remote monitoring for retrieving data or reporting site conditions can be made via GPRS/3G cellular network, radio link, satellite, Ethernet, etc... as well as via INTERNET by means of the **WEBTRANS** Platform optional service offered by **GEONICA** (Web Posting).

Mounting the wind sensors and the Data Logger / Transmitter, on a 60-meter stainless stell meteorological tower

In particular, GPRS/3G, cellular network, is a very efficient and inexpensive method for transmitting wind, meteorological and turbine data in near real-time, allowing also to remotely detect if all sensors on the met tower are functioning properly, preventing significant data loss and reducing, at the same time, maintenance costs.

Our Remote Data Logger Model METEODATA-2000/3000C Series incorporates a built-in GPRS or 3G modem, that also allows a user to call into the logger and view live data at the site, as well as to download data site conditions and even to change data collection parameters or to program new alarms, all remotely from the user's computer.

To program the **METEODATA** remote statios as well to download data manage all the field stations on a network, the **GEONICA SUITE** software package, developed specifically for such purposes, mast be installed on a laptop computer or on the central station server.



METEODATA-3000C Data Logger, a high gain GPRS tranmitting antenna and a Solar Panel, mounted on the met tower




### **METEODATA DATA LOGGER AND COMMUNICATIONS**

- # Analog and Digital input Channels (16 or 24 plus 4/6 serial ports)
- # Battery operated. Very low power consumption (less tha 10mA @ 12V)
- # Long term unattended data collection (64 MB memory)
- # Very high resolution (24 bit A/D converter)
- # Time- stamped data recording allowing historical analysis
- # Remotly programmable (data collection and automatic alarms)
- **# METEODATA-2000/3000C** Series datalogger incorporates a GPRS/3G modem for communications via digital cellular nerworks.
- # Ethernet, radio or satellite links are also available options.
- # Additional Technical information about our Data Loggers can be found in the following documents:
  - Brochure nº 9722.0039 (2000C Series)
  - Brochure n° 9722.0044 (3000C Series)



# WIND AND OTHER METEOROLOGICAL SENSORS AND TURBINE PARAMETERS

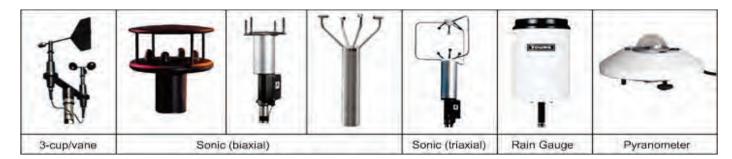

- # Choice of Sonic, Propeller or conventional 3- cup anemoter and vane
- # Turbine parameters (current, voltage, power, etc...)
- # Additional meterological sensors as Temperature, Humidity, Solar Radiation, Atmospheric Pressure, Precipitation, Present Weather, etc... optional.

#### **MET TOWERS**

# Stainless steel towers of up to 50, 60, 85 or 100 meters height. Wind and other sensors can be mounted anywhere along the lenght of the tower.

### **WEB POSTING**

**# GEONICA** offers the optional **WEBTRANS** Platform Service for near real-time data and graphical presentation of all measured parameters via Internet.

## DIGICAM DIGITAL CAMERAS

# DIGICAM colour digital cameras can be connected to the METEODATA remote unit for still images transmission over the same communications network used for wind and meteorological data.

